
+386 (0)59 071 390
prodaja@minitec.si
02.11.2026


HINGED FOOT M16 D100 WITH FIXATION BORES L = 150 MM

Code: 211848/0

Adjustable foot M16 D100 with multiple mounting holes for stable and flexible support of aluminum structures.

Link to the product →

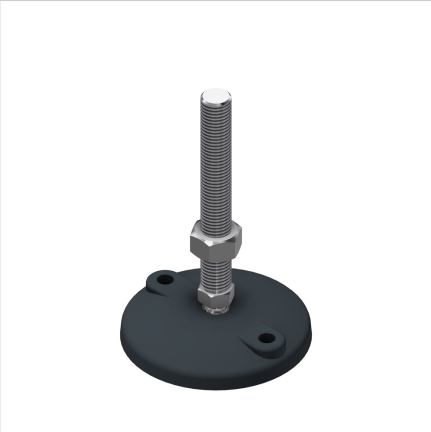

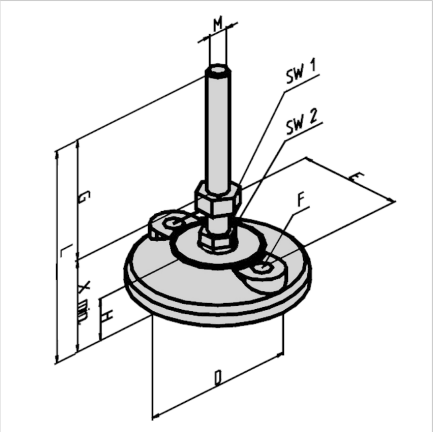

Technical data/items supplied

- Plate PA, grey
- Anti-slip license NBR, black
- Spindle steel, galvanized
- Lock nut steel, galvanized
- Angular compensation up to 15°
- Thread M16
  Plate Ø = 100 mm
  Dimension G = 108 mm
  Dimension X = 45 mm
  SW1 = 24 mm
  SW2 = 17 mm
  Dimension L = 150 mm
  Dimension E = 74 mm
  Ø F = 9 mm
  Load capacity max. 1000 kg
- Version with L = 230 mm available under Part no. 21.1848/1
- Weight = 0.385 kg/piece

Applications

- Height adjustable constructions of all kinds
- Protective equipment, tables, showcases
- Conveyors, system workstations

Assembly

- Directly in the central bore of the profile (can be drilled with thread up to M12)
- Larger threads in connection with connection plate
- For threads larger than M12, the hinged feet must be mounted in conjunction with the connection plate
- For profiles 45 x 90 und 90 x 90 a base and transport plate is required, if the feet are to be positioned centrally.