+386 (0)59 071 390
prodaja@minitec.si
05.11.2026


LINEAR AXIS LR 6 Z - 90 STROKE = MM


Code: 280501/0

Linear guides LR 6 - 45 x 90 for precise motion with minimal friction. Assembled linear axis ready for immediate use.

Link to the product →



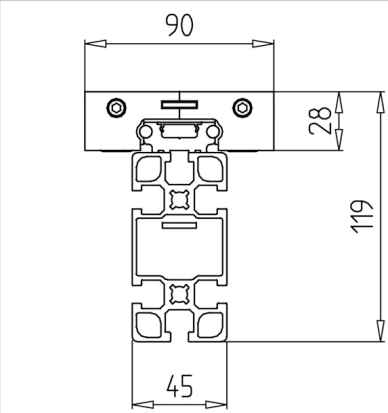

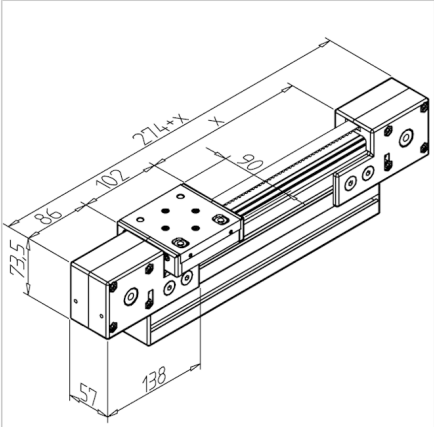

Technical data/items supplied

- Linear guide, ready for use, consisting of:
- 1x rail LR 6 S with precision steel shafts h6, Ø 6 mm, on carrier profile 45 x 90 F
  1x carriage LR 6 Z with integrated timing belt mounting
  2x timing belt deflectors
  1x timing belt 16 AT 5, steel reinforced
- **Please specify stroke length X and reverse unit**
- Max. stroke length 5867 mm
- Stainless version **part no.** 280501/1
- Weight = (basic weight) 2.25 kg
- Extra weight = 0.453 kg / 100 mm stroke

Applications

- Handling devices
- Measuring devices
- Calibration devices
- Precise guidance of doors or large extracts

Assembly

- Strap is tensioned over the reversing unit