
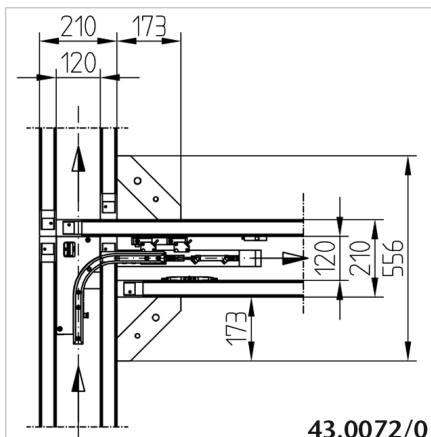


OUTWARD TRANSFER 200 RIGHT

Code: 430072/0

[Link to the product →](#)

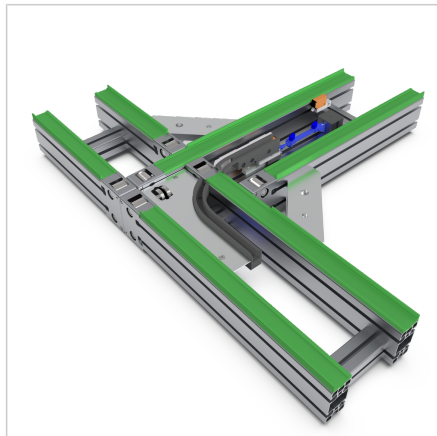

Technical data/items supplied

- Pneumatically actuated
- Carrier profile 45 x 90
- WT-guide 2 parts, PE
- Cover PE
- Friction wheel with drive roller
- 2 Pneumatic cylinders
- 4 beams
- Fastening material

Applications

- Deflect WT's from secondary sections into the base circuit
- Separation of work procedures from machine cycle
- Inserting further processing stations
- Forming storage units
- With active outward transfer, the WT is swung out at 90° from the track in transverse transport. The orientation of the WT is not changed.
- If the chute is inactive, the WT remains in the basic circuit
- Status query of the chute via the sensor
- Suitable for track width 200

Assembly

- Outflow on the right **part no. 430072/0**
- Mount friction wheel on pulley (in conveyor direction, at the longer conveyor side)
- Install pneumatic cylinder
- Install the guide curve
- Screw on cover
- Connect and align the transverse transport with beams
- Connect pneumatic cylinder to compressed air supply