
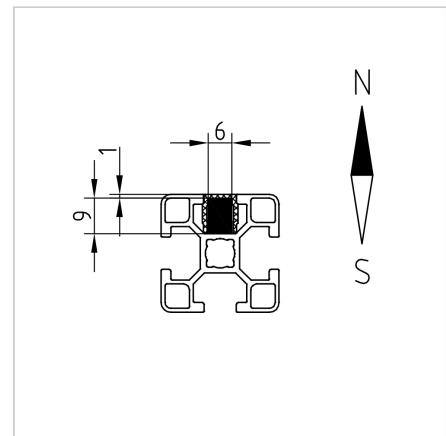


ROTARY LOCK 0

Code: 210040/0

Compact adhesive magnet for tools and precise tracking under conveyor belts, compatible with all profile series 30.

[Link to the product →](#)

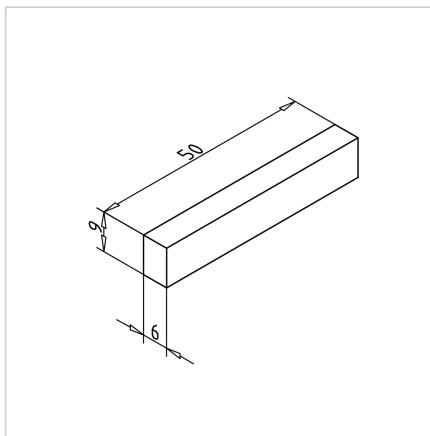

Technical data/items supplied

- NeFeB N45, nickel-plated
- Without fastening kit
- Attention: Electric- and memory devices can be faulted by the magnet
- Power density, BH_{mx} = 342kJ/m³
- Remanence, Br = 1320 mT
- Coercive field strength H_{CJ} = 955 kA/m
- Max. service temperature +80 °C
- Weight = 0.023 kg/piece

Applications

- Adhesive magnet for tools
- Use under conveyor belts as tracking, for magnetizable conveying products or at higher conveying speeds
- Fitting for all profiles of profile series 30

Assembly

- Snap or slip the cover profile into profile groove
- Insert magnet into t-slot
- For fastening: (mighty recommended) Use end cap AL, set screw with square nut or t-slot bar