+386 (0)59 071 390
prodaja@minitec.si
02.11.2026


SCREW CONNECTION 32


Code: 210897/0

Screw connection 30 GD ensures reliable joining of 30 series aluminium profiles without extra machining. Enhances strength and stability.

Link to the product →



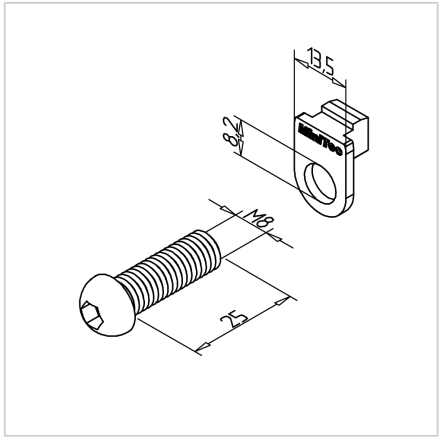

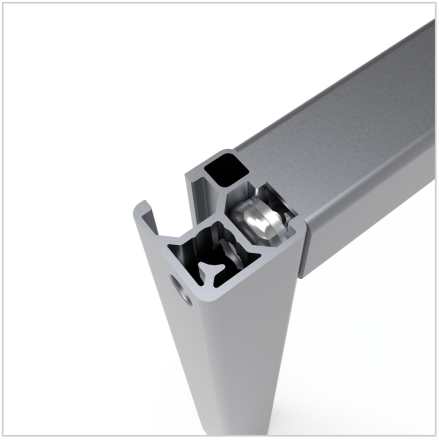

Technical data/items supplied

- Aluminium, Pressure die-casting, bright
- Anti-twist lock with fillister head screw
- Weight = 0.012 kg/piece

Applications

- Connection of Series 30 profiles

Assembly

- Insert thread M8 x 25 into the centre hole of the profile
- Insert into vertical profile through-hole Ø 7 mm
- Fix the screw with the anti-rotation device on the horizontal profile and insert it into the groove of the vertical profile
- Use Allen key to pull through bore Ø 7 mm
- Recommended tightening torque: 20 Nm
- The bore Ø 7 mm can be closed with plug 7 **part no.** 221215/1, should be used with our closed t-slot profiles