+386 (0)59 071 390
prodaja@minitec.si
02.11.2026


TIMING BELT PULLEY LR 6_ 14 STAINLESS FEATHER KEY 5 MM


Code: 280509/3


Timing belt end piece LR 6_14 stainless for precise and reliable motion transmission in linear guides.

Link to the product →



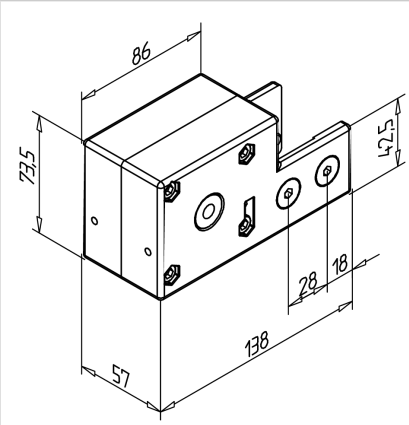

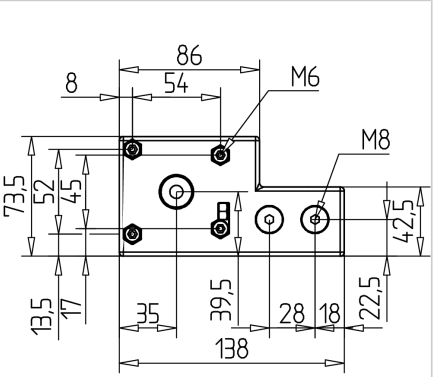

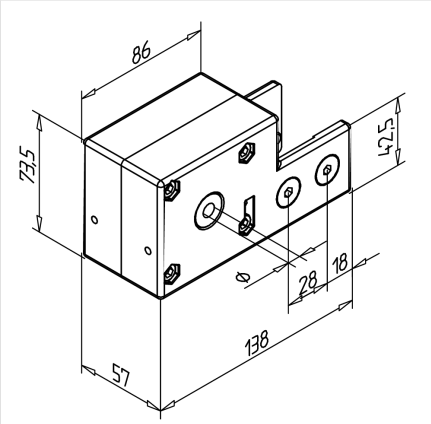

Technical data/items supplied

- Aluminium, Pressure die-casting, powder-coated, grey
- Connecting elements in stainless steel
- Aluminium pulley with flanges made of stainless steel for timing belt 16AT5
  36 teeth, effective diameter 57.3 mm
  Timing belt length required within the return/reversing point 160 mm
  max. Torque 30 Nm
- Pulley with bore 14 mm and feather key groove 5 mm
- 2 ball-bearings
- Weight = 0.960 kg/piece

Applications

- For MiniTec linear guides LR 6 Z

Assembly

- Insert square nut M8 in rail and pre-position
- Guide the timing belt through the reverse unit
- Guide the pulley on rail end
- Pre-assemble fastening screws
- Fix timing belt on slide
- Tighten at pulley using hex Allen key SW3
- Tighten fastening screws