+386 (0)59 071 390
prodaja@minitec.si
03.11.2026


TIMING BELT PULLEY T90 _24 FEATHER KEY 8 MM


Code: 280082/6

Timing belt end piece T90 _24 ensures precise and reliable motion transmission in linear guides.

Link to the product →



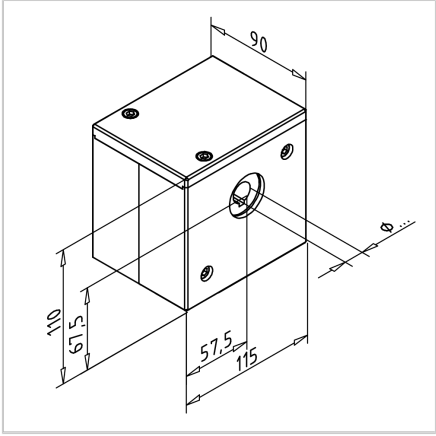

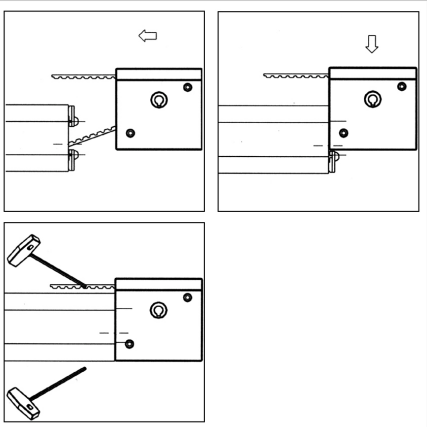

Technical data/items supplied

- Housing 3-piece, anodized aluminum
- Connection elements, steel, galvanised
- Aluminum pulley with stainless steel flanges for timing belt 32AT10
  19 teeth, effective diameter 60.48 mm
  Required toothed belt length within the deflection 210 mm
  max. torque 130 Nm
- Pulley with bore 24 mm and feather key groove 8 mm
- 2 ball-bearings
- Weight = 2.692 kg/piece

Applications

- All MiniTec linear guides

Assembly

- Provide rails with thread M8 at both sides, screw in power-lock fastener **part no.** 211018/0
- Guide the timing belt through the reverse unit
- Insert pulley unit from top
- Tighten power-lock fastener
- Tighten the timing belt
- For mounting the corrosion-resistant version, use profile connector H **part no.**211018/1